


Cloud 9



FEATURES

- Professional fogger gives high-impact low-lying fog effect on stage or in ballrooms.
- Continuous operation produces fog to cover 3,230 ft² (300 m²) area.
- Ultrasonic agitator combines distilled water with fog to produce low-lying fog effect.
- Ships in rugged flight case with locking casters with hinged top cover to allow for operation even when closed.
- Control via on board digital display or DMX.
- Integrated water drain system makes cleanup fast and easy.
- Works with fog fluid, haze fluid, or quick-dissipating fluid for desired effect.
- Use without dry ice or CO₂, so no special licensing/training required.

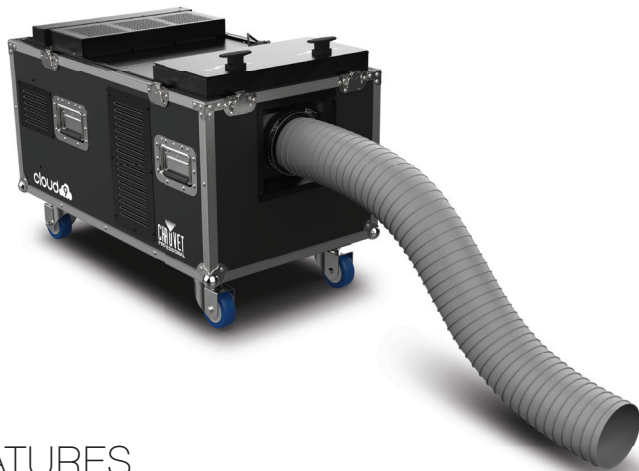

SPECIFICATIONS

DYNAMIC EFFECTS

- Output: 15,000 cfm
- Low Fluid Shutdown: Yes

CONSTRUCTION/PHYSICAL

- Dimensions: 33.85 x 19.29 x 24.80 in (860 x 490 x 630 mm)
- Weight: 121.3 lb (55 kg)
- Exterior Color: Black
- Fluid Tank Capacity: 0.92 gal (3.5 l)
- Water tank Capacity: 5.3 gal (20 l)
- Fluid Consumption (QDF): 40 ml/min
- Fluid Consumption (PHF): 40 ml/min
- Fluid Consumption (HDF): 40 ml/min
- Water Consumption: 166 ml/min
(2 hours max runtime @ 100% output)

CONNECTIONS

- Power Connection: Edison plug to Neutrik® powerCON®
- Power Input: Neutrik® powerCON® (2x 120 V, 1x 230 V)
- Data Connectors: 3- and 5-pin XLR
- Cable Length (power): 5 ft (1.5 m)

CONTROL

- Control Protocol: DMX
- DMX Channels: 2
- Modes/Personalities: 1 personality
- On-Board Control: Yes
(Manual Variable output and Timer Control)

ELECTRICAL

- Input Voltage: 120 VAC, 60 Hz or 230 VAC, 50 Hz
- Power and Current: 2,430 W, 20.8 A @ 120 V, 60 Hz
- Power and Current: 4,770 W, 20.8 A @ 230 V, 60 Hz
- Heat-up Time: 3 min
- Breaker Size: 20 A, 125-250 V

CERTIFICATIONS/QUALIFICATIONS

- CE, MET
- IP Rating: IP20, dry location
- Temperature (Ambient): -4 °F to 113 °F (-20 °C to 45 °C)

WHAT'S INCLUDED

- Cloud 9
- Seetronic powerCON power cord
- Directional hose and hose clamp

OPTIONAL ACCESSORIES

- Neutrik powerCON cables
- DMX Cables