



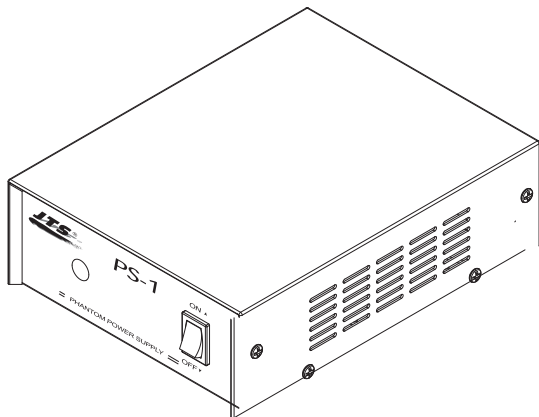

PS-1/PS-2 Phantom Power Supply

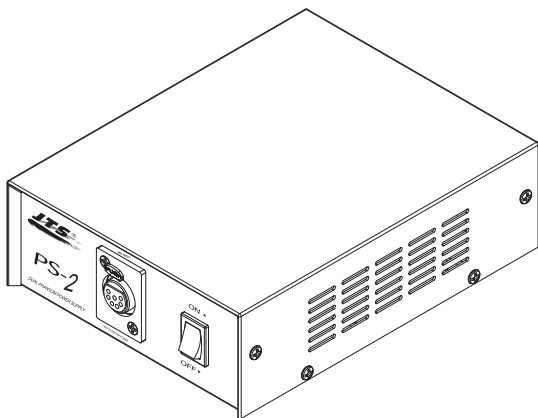

Thanks for choosing JTS PS-1/ PS-2 Phantom Power Supply. In order to obtain the best efficiency, you are recommended to read this manual before applying.

PS-1 is a single channel, AC powered 48V phantom power supply for condenser microphones. PS-1 contains a power switch with LED indicator, and one each male and female XLR connector .

48V Phantom Power Supply provides constant 48V power for condenser microphones when phantom power is not available on a mixer or for field recording direct to tape, hard disk computer based systems.

The PS-2 is a dual input version of PS-1.

SPECIFICATION

Number of Channels: PS-1:1
PS-2:2

Regulated Output Voltage: $48V \pm 2V$ DC

Short Circuit Output Current: 14 mA

Signal To Noise Ratio: 105 dB

Frequency Response: 10-22,000 Hz

AC Input: 110/220V AC, 50-60 Hz, 3W max






Input Connector: 3-pin XLR Female

Output Connector: 3-pin XLR Male

Dimensions(m/m): 143.6(W) x 55.9(H) x 184.7(D)

Weight: 1.2kg

DIMENSIONS (m/m)



www.jts.com.tw



59010-068