





## Description

The Thunder-KS1P I is a compact passive subwoofer featuring a long excursion 12" cone driver with 3" voice coil.

The Thunder-KS1P I features 2x SpeakON NL4 connectors that allow to input the signals from external active systems or amplifiers, with either a 2-wire or a 4-wire cable, as well as route the signal to other loudspeakers.

Input terminals selection and link wiring.

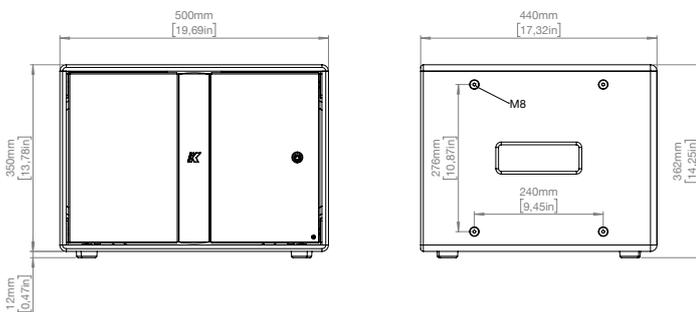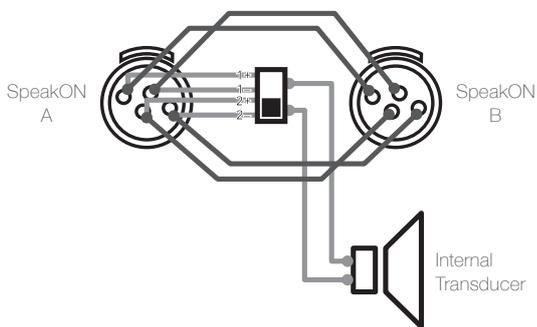

| Technical Specifications        |  |
|---------------------------------|--|
| Type                            | Passive subwoofer  |
| Transducers                     | 12" neodymium magnet woofer  |
| Frequency Response <sup>1</sup> | 35 Hz – 150/450 Hz (-6 dB) crossover dependant   |
| Crossover                       | External DSP-controlled, Low Pass @ 150 Hz up to 450 Hz, preset dependant  |
| Max SPL <sup>2</sup>            | 134 dB peak  |
| Nominal Impedance               | 8Ω   |
| Power handling                  | 1200 W peak  |
| Coverage                        | Omni   |
| Connectors                      | Speaker input/parallel output<br>2x SpeakON NL4<br>Input terminals selectable:<br>IN+Link 1+/1- (parallel), Link 2+/2-<br>Link 1+/1- , IN+Link 2+/2- (DEFAULT) |

| Handling & Finishes |  |
|---------------------|--|
| IP Rating           | IP54                                       |
| Dimensions (WxHxD)  | 500 x 350 x 440 mm (19.7 x 13.8 x 17.3 in) |
| Weight              | 18 kg (39.7 lb)                            |

<sup>1</sup> Extensible with dedicated preset according to the midrange crossover point.

<sup>2</sup> Maximum SPL is calculated using a signal with crest factor 4 (12dB) measured at 1 m.

Notes:

Passive loudspeakers require dedicated presets loaded onboard K-array amplifiers. New materials and designs are introduced into existing products without previous notice. Present systems may differ in some respects from those presented in this document.

