



REV. A1	REVISED DESCRIPTION FIRST RELEASE	DATE 2013.11.06	CHECKED
---------	--------------------------------------	--------------------	---------

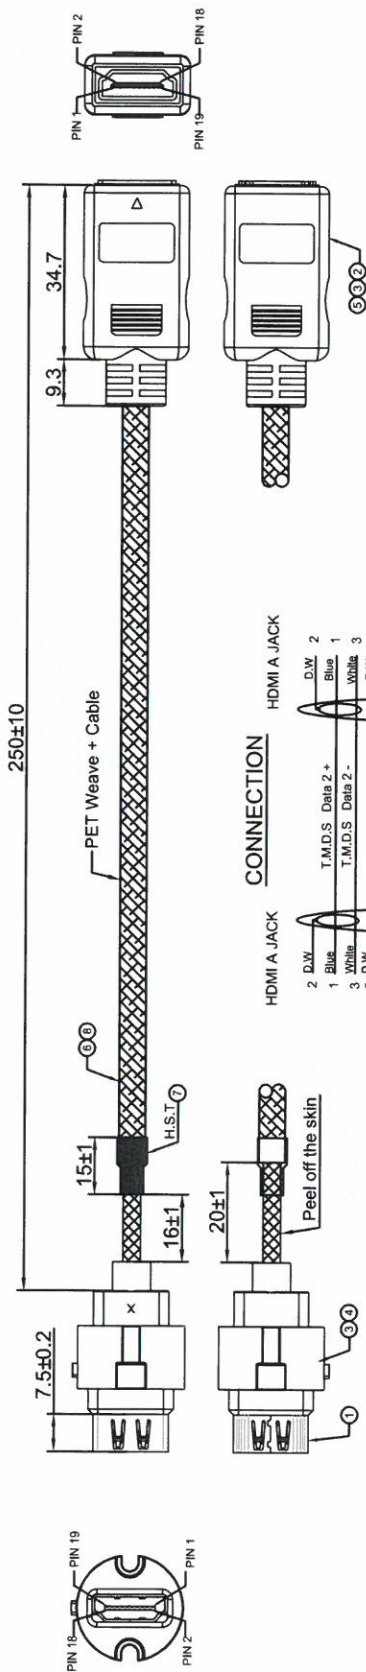

CONNECTION

HDMI A JACK		HDMI A JACK	
2 D.W	Blue	D.W	2
3 White	T.M.D.S. Data 2+	Blue	1
5 D.W	T.M.D.S. Data 2-	White	3
6 Green	T.M.D.S. Data 1+	D.W	5
7 Red	T.M.D.S. Data 1-	Green	4
9 D.W	T.M.D.S. Data 0+	White	6
10 White	T.M.D.S. Data 0-	Red	7
11 D.W	T.M.D.S. Clock+	White	8
12 White	T.M.D.S. Clock-	Brown	10
13 Red	Utility/HEAC+	White	12
14 Yellow	HPD/HEAC-	D.W	17
15 SCL	GEC	Yellow	14
16 Orange	SDA	White	19
18 White	+5V POWER	Red	13
		Yellow	15
		Orange	16
		White	18

HANK SIZE

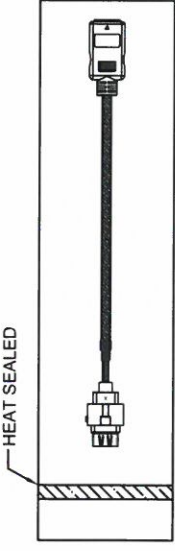

Package: 1PC / PE Bag

- ELECTRIC TESTING:**
1. 100% OPEN & SHORT TESTING
 2. INSULATION RESISTANCE: $\geq 20 M \Omega$
 3. CONDUCTOR RESISTANCE: $\leq 3 \Omega$
 4. VOLTAGE: 300V DC / 0.1s

8	Cable Spec: ((7/0.06TC+Polyolefin)*1P+7/0.08TC+AL/Mylar)*5P+(7/0.08TC+Polyolefin)*4C+AL/Mylar+16/8/0.10TC 85%)*1C OD:4.5±0.15mm Black PVC Jacket Printed With White Texts: High Speed HDMI® Cable With Ethernet UL(Logo) AWM 20276 VW-1 80°C 30V E81280-D CHING TAI (SAP:307187G01000000B)	SAP NO.:	PART NO
7	Heat Shrink Tuber/Black (VW-1 ϕ 6.0mm, L=15mm)	DOC No.:	REVISION
6	PET Weave / Black (VW-1 ϕ 4.5mm)	CUSTOMER:	UNIT
5	Black PVC 50P / UL94V-0(SAP:31401012050/ CYT-1274)	CUSTOMER P/N:	SCALE
4	PVC-Red 35P / UL94V-0(SAP:31401242035/ CYT-2633)	DESCRIPTION	PAGE NO
3	Inner Mold - PE (SAP:31400C11000)	APPROVAL	DATE
2	HDMI A Jack-Shell/Nickel.Pin/Au-Plated(SAP:304370109N)	CHECKED	DRAWN
1	HDMI A Jack-Shell/Nickel.Pin/Au-Plated 15u"(SAP:304370118N)		
ITEM	SPECIFICATION		

Louis 曾