

Highlights:

- 2 x XLR inputs
- Integrated Bluetooth receiver (Version 4.2)
- 4 x 4 channels Dante™ & AES67
- Internal mixing & DSP
- Ultra efficient cooling
- Superior sound quality & low latency

Product information:

The NWP220 is a Dante™/AES67 network input panel, featuring two XLR input connectors and an integrated Bluetooth receiver, which can be used to transmit audio signals in a Dante™ audio network.

The audio inputs can be switched between line-level and microphone-level audio signals and phantom power (+48 V DC) can be applied to the XLR input connectors for powering condenser microphones. Various further integrated DSP functions such as EQ, automatic gain control, and other device settings can be configured through the AUDAC Touch™.

The IP-based communication makes it future-proof while also being backwards compatible with many existing products. Thanks to the limited PoE power consumption, NWP220 is compatible with any PoE network-based installation.

Besides the elegant design, the front panel is finished with high-quality fingerprint-resistant glass. The wall panels are compatible with standard EU-style in-wall boxes, making the wall panel the ideal solution for solid and hollow walls. Black and white colour options are available to blend into any architectural design.

Applications:

- Corporate
- Sporting facilities
- Hotels
- Education
- Government facilities
- Bars & Restaurants



Certification:



Properties:



Additional Inputs:



System specifications:


Inputs	2 x XLR female (in)
Control	2 buttons - Mic / Line switching
Indicators	2 LED's (RGB) - Input status
Configurable settings	IP settings
	Device name
	Input range (Mic / Line)
	Gain
	Phantom power
	DSP (EQ)
	Mixing
Configuration	Audac Touch™
Integrated DSP	Yes (EQ)
Automatic level control	Yes
Phantom power	+48 V DC
Power Supply	PoE powered (IEEE 802.3at)
Connectors	RJ45 (network + PoE)
	1 x XLR female (audio in)


Product Features:

Construction	ABS
Front finish	Elegant front panel with glass
Colours	Black (RAL9005) (NWP220/B)
	White (RAL9003) (NWP220/W)
Compatible devices	Any Dante™/AES67 compatible audio device
Dimensions	80 x 80 mm (W x H) (Remote wall panel)
Installation standard	Compatible with EU installation materials

Variants:

- NWP220/B - Black version
- NWP220/W - White version

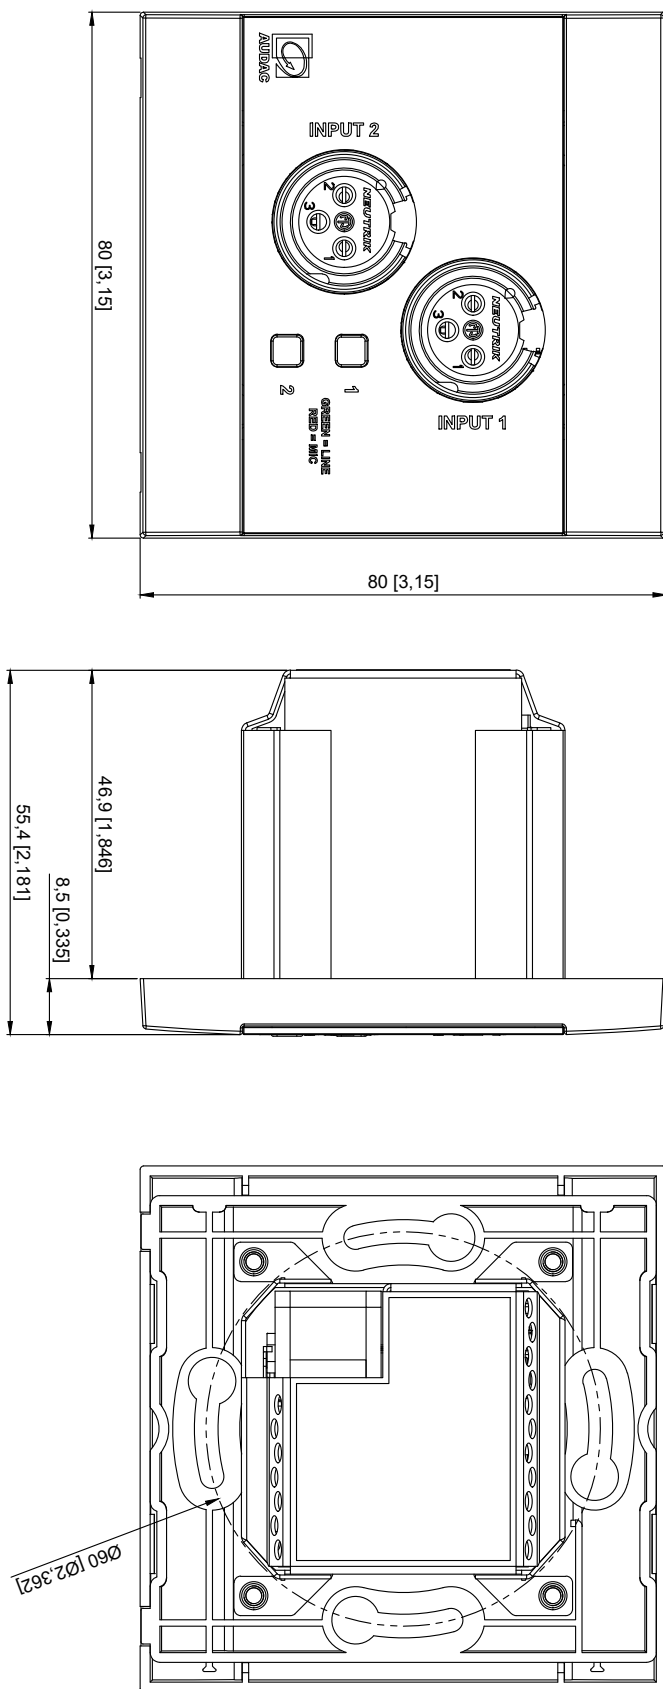

		NWP220		Product description DANTE/AES67 NETWORKED AUDIO INPUT PANEL 2XLR & BT (4CH) + POE	
				MM [INCH]	Scale 1 : 1