



NWP222

Network in- & output panel - 2 x XLR in- & out + BT (4 x 2 CH)

Highlights:

- 2 x XLR inputs & outputs
- Integrated Bluetooth receiver
- 4-channel Dante™/AES67
- Internal mixing & DSP processing

Product information:

The NWP222 is a Dante™/AES67 network input panel, featuring two XLR input and output connectors and an integrated Bluetooth receiver, which can be used to transmit or receive audio signals in a Dante™ audio network. The audio inputs can be switched between line-level and microphone-level audio signals and phantom power (+48 V DC) can be applied to the XLR input connectors for powering condenser microphones. Various further integrated functions such as integrated equalizing, automatic level control and other device settings can be configured through the AUDAC Touch™ app.

The front panel is finished with high-grade materials such as hardened glass makes them blend into any environment. These wall panels are compatible with standard EU-style in-wall boxes, these wall panels are the ideal solution for solid and hollow walls.

The IP-based communication makes it future-proof while also being backwards compatible with many existing products. In contrast, the limited PoE power consumption makes it compatible with any PoE network-based installation.

Applications:

- Bars & Restaurants
- Education
- Hotels
- Corporate
- Sporting facilities
- Government facilities



Certification:



Properties:



Additional Inputs:



System specifications:


Inputs	2 x XLR female (in)
	2 x XLR male out
Control	2 buttons - Mic / Line switching
Indicators	2 LED's (RGB) - Input status
Configurable settings	IP settings
	Device name
	Input range (Mic / Line)
	Gain
	Phantom power
	DSP (EQ)
	Mixing
Configuration	Audac Touch™
Integrated DSP	Yes (EQ)
Automatic level control	Yes
Phantom power	+48 V DC
Power Supply	PoE powered (IEEE 802.3at)
Connectors	XLR Female (mic in)
	RJ45 (network + PoE)
	1 x XLR male (audio out)

Product Features:

Construction	ABS
Front finish	Elegant ABS front panel with glass
Dimensions	160 x 88 mm (W x H) (Remote wall panel)
Colours	White (RAL9003) (DWP240/W)
	Black (RAL9005) (DWP240/B)
Compatible devices	Any Dante™/AES67 compatible audio device
Installation standard	Compatible with EU installation materials

Variants:

- NWP222/B - Black version
- NWP222/W - White version

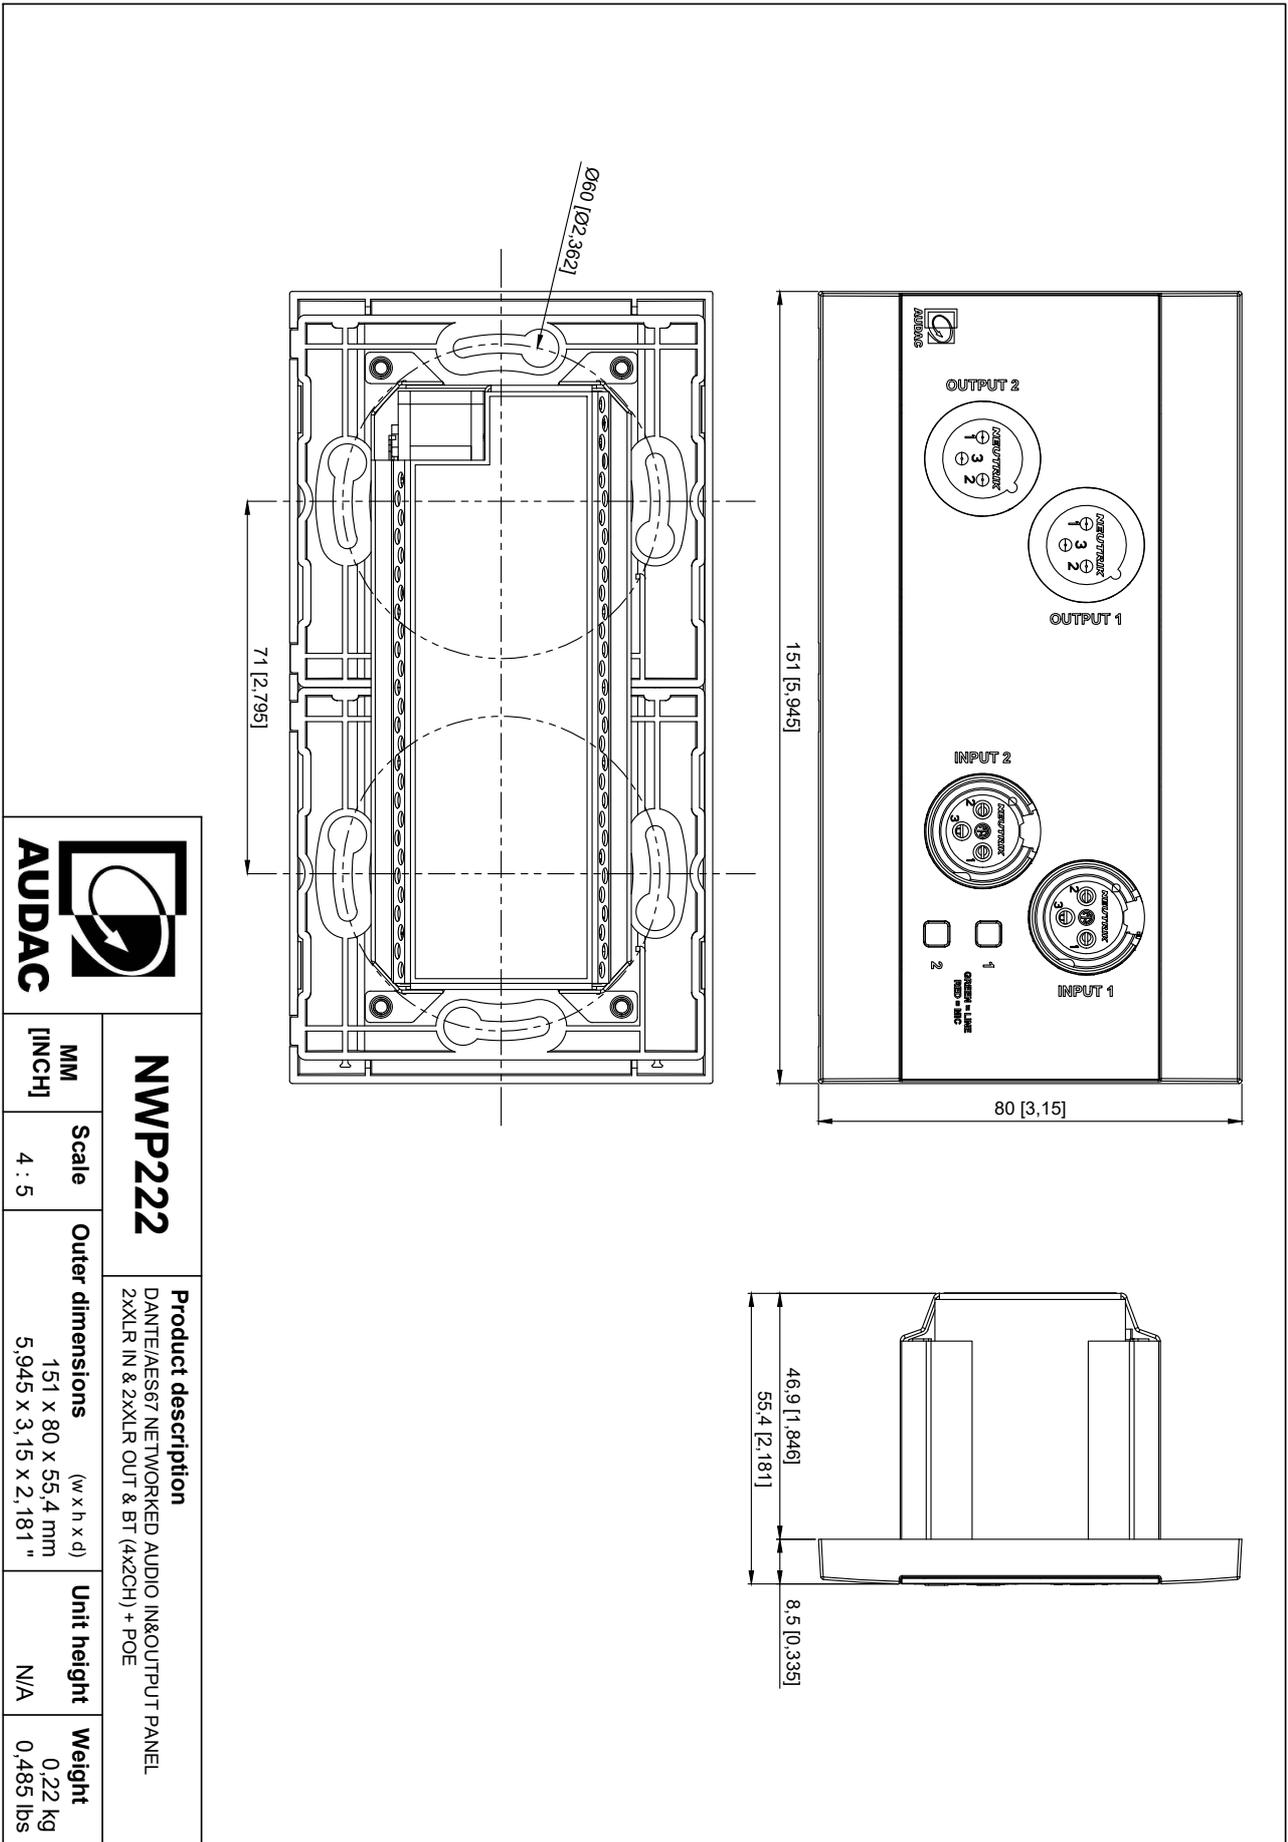

		NWP222		Product description DANTE/AES67 NETWORKED AUDIO IN&OUTPUT PANEL 2XLR IN & 2XLR OUT & BT (4X2CH) + POE	
Outer dimensions		(w x h x d)		Unit height	
151 X 80 X 55,4 mm 5,945 X 3,15 X 2,181"		N/A		Weight 0,22 kg 0,485 lbs	