



# DPA616

## Sixteen-channel Class-D amplifier 16 x 60W

### Highlights:

---

- Lightweight class-D amplifier
- Stereo & bridged mode
- Terminal block output connections
- Advanced DSP and loudspeaker management
- 16 Channel design (8 channel bridged)



The DPA616 is a professional sixteen channel power amplifier which is capable of delivering a power of 60 Watt to 4 Ohm loads connected to the 16 output channels. When used in bridge mode, it can deliver a power of 120 Watt to 8 Ohm loads connected to the 8 bridged outputs. This way, the DPA616 is the perfect solution for installed multi-zone audio distribution systems with 8 or 16 zones. This amplifier is designed as a no-nonsense amplifier with only the necessary controls and connections which creates great simplicity in use and installation. The input connections are all performed with 3-pin Terminal block connectors, allowing the connection of balanced input signals. Every channel is fitted with a separate gain control potentiometer and for every two input connectors, there is a stereo / bridge & parallel switch provided whereby two channels can be bridged or linked in parallel, avoiding a cable clutter when multiple channels should be fed with the same input signal. The output connections are performed with 4-pin Terminal block connectors allowing connections for separate or bridged output channels. A built-in multipurpose protection circuit protects against DC malfunction, short circuit, overheating, overload and limits the signal when necessary. This all is housed in a double rack space, steel 19" rack mount housing.

### Applications:

---



- Bars, restaurants
- Public facilities
- Corporate spaces

## System specifications:

Frequency	Response ( $\pm 3$ dB)	20 Hz - 20 kHz
Signal / Noise		> 100 dB
THD+N (@ 1 kHz)		< 0.1%
Technology		Class-D
Inputs	Sensitivity (1W/1m)	-20 dB ~ +20 dB
	Connector	3-pin Euro Terminal Block (Pitch - 3.81 mm)
Outputs	Connector	4-pin Euro Terminal Block (Pitch - 5.08 mm)
Power	Supply	Switching mode
	Source	100 ~ 240 V AC / 50 ~ 60 Hz
Protection		DC Short circuit
		Over heating
		Over load
		Signal limiting
Operating temperature		0° ~ 40° @ 95% Humidity
RMS Power	@ 4 $\Omega$ Stereo	16 x 60 W
	@ 8 $\Omega$ Bridge	8 x 120 W
	@ 8 $\Omega$ Stereo	16 x 30 W

## Product Features:

Dimensions		482 x 88 x 322 mm (W x H x D)
Weight		8.200 kg
Mounting		19"
Unit height		2 HE
Construction		Steel
Colours		Black
Accessories	Included	16 x 3-pin Euro Terminal Block Input connectors
		8 x 4-pin Euro Terminal Block outputs connector

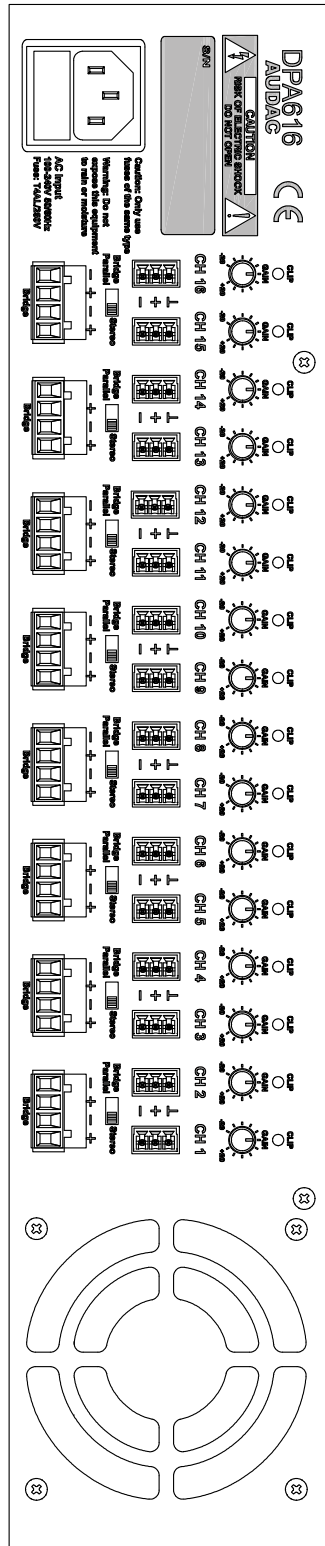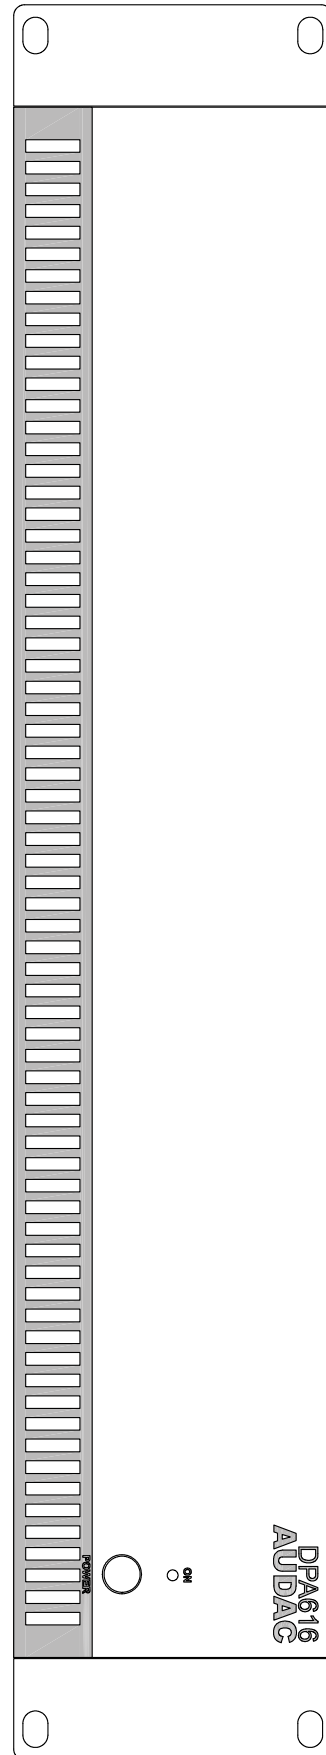

<b>DPA616</b>	<b>Product description:</b> SIXTEEN CHANNEL CLASS-D POWER AMPLIFIER - 16x60W/8x120W
<b>Weight:</b> 8,2 kg	<b>Outer dimensions:</b> (w x h x d) 483 x 88,1 x 322
	<b>Unit height:</b> 2 HE