



# XMP44

## SourceCon™ professional modular audio system

### Highlights:

---

- Remote control web interface (HTML5)
- RS232 & TCP/IP control port
- Front PFL speaker with vol. control
- 2.8" LCD display with intuitive user interface
- Fully flexible modular structure
- 4 x SourceCon™ interface card slots
- Wide variation of modules separately available
- Front USB interface for each module (4x)
- Simultaneous operation for all modules

The XMP44 is a professional modular audio system with 4 SourceCon™ interface card slots where to a wide variation of optional modules can be installed. The variety of available modules ranges from FM tuners to DAB&DAB+ tuners, internet radio tuners, voice file interfaces and many more. The flexible architecture allows any project combination up to four sources, resulting in a truly versatile solution that will live up the needs for any user taking high regard of crystal clear audio reproduction. Simultaneous operation for all four modules makes it a compact multi-source system which is the perfect expansion for any multi-zone audio system. The front panel of the system accommodates a 2.8" TFT display in combination with a push rotary function dial and 4 tactile pushbuttons. The controls and indicators on the front panel of the unit are guaranteeing an intuitive and user friendly operation, allowing hassle free operation and configuration to even unexperienced users. Four USB interfaces (one for each module) are enabling playback or storage of media and voice file, while pre-listening for each output is possible through a built-in PFL speaker with individual volume control. Both RS-232 and TCP/IP communication ports are implemented, allowing system integration with any home or industrial automation system. Using the freely available AUDAC Touch™ application for smart devices guarantees total system control and configuration from any device on any location and at any time. An optional Dante™ interface is available for the XMP44. The installation of this network interface allows receiving and sending of low latency, high quality audio over a standard Ethernet network.

### Applications:

---

- Retail
- Public facilities
- Houses of worship
- Clubs, bars, restaurants



### Certification:

---



### Additional Inputs:

---



## System specifications:


---

Inputs	Type	4 x SourceCon™ interface card slots
		4 x USB interface
Control		Front panel
		RS-232
		TCP/IP
		Audac Touch™
		Web (HTML5)
Frequency	Response (± 3 dB)	20 Hz - 20 kHz
Display	Type	2.8" Graphical LCD
Monitoring		Front PFL speaker with vol control
Power	Source	110 ~ 240 V AC / 50 ~ 60 Hz
	Consumption	2 W (without module installed)
	Supply	Switching mode
Operating temperature		0° ~ 40° @ 95% Humidity

## Product Features:

---

Dimensions		482 x 44 x 330 mm (W x H x D)
Weight		3.400 kg
Mounting		19"
Unit height		1 HE
Construction		Steel
Colours		Black

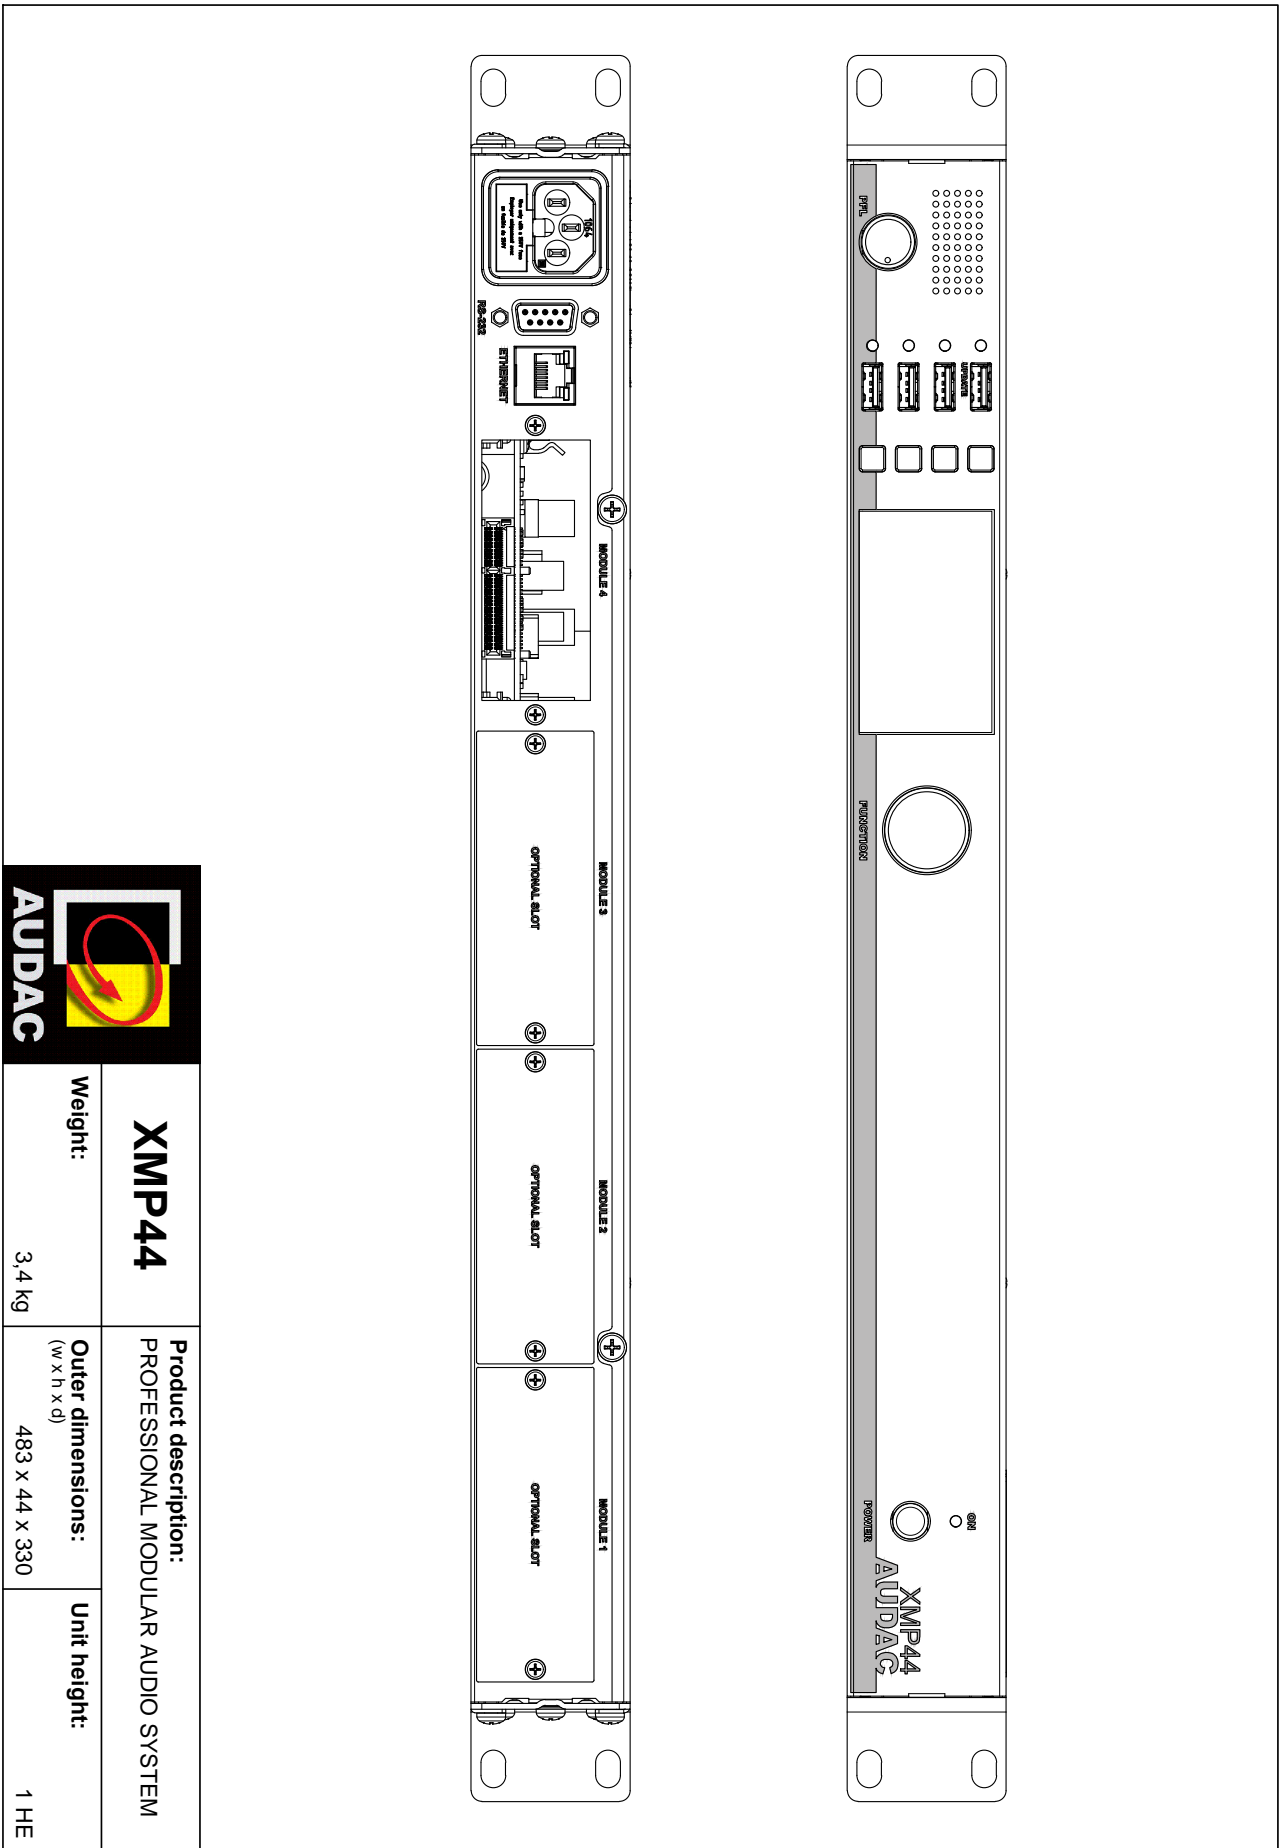

<p><b>XMP44</b></p>	<p><b>Product description:</b> PROFESSIONAL MODULAR AUDIO SYSTEM</p>
<p><b>Weight:</b> 3,4 kg</p>	
<p><b>Outer dimensions:</b> (w x h x d) 483 x 44 x 330</p>	<p><b>Unit height:</b> 1 HE</p>