




# Performance



#### Technical Information

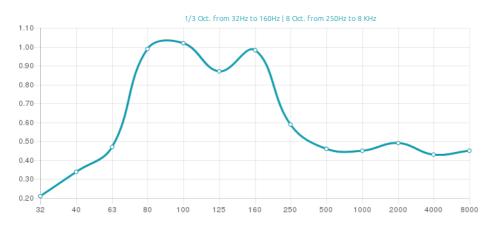





#### Features

Туре:

Pistonic Diaphragmatic Absorber

Absorption range: 80 Hz to 120 Hz

Peak Absorption Frequency: 90 Hz

#### Material:

- Acoustic fabric | Natural Wood v eener | Lacquered HMDF
- Marine grade plywood structural frame
- Calibrated cell acoustic foam

This panels can only be installed on vertical wall corners. Not for ceiling use.

### Dimensions:

FG | 595x1190x56mm | 8.52 Kg

# artnovion

## Athos W - Bass Trap - Wall

#### Wall Bass Trap

With a peak absorption from 80 Hz to 120 Hz, the Wall Bass Trap offers an enriched acoustic experience, directly attenuating standing waves. The various front designs available for the Wall Bass Trap allow you to create artistic patterns when mounted on the walls of your home studio or recording room, completely indistinguishable from the Artnov ion absorber range.

The Wall Bass Trap - 595 x 1190 - equivalent to 2 standard panels, is equipped with a weighted pistonic membrane enclosing a volume with a high performance acoustic core. This design allows for a precisely tuned, high performance absorption. Bringing you the maximum performance in as least space as possible.

#### Product finishes

#### (FG) Product Fire Grade - Furniture Grade



FG | (L01) Blanc







FG | (L03) Rouge



FG | (LO5) Silver

FG | (L10) Bronze



FG | (L06) Noir Vintage











FG | (L11) Raw White

FG | (L07) Graphite FG | (L08) Rose Gold FG | (L09) Classic



FG | (L12) Raw

Black







Gold



FG | (W 01) Cerise FG | (W 02) Marron FG | (W 03) Wenge

#### Recommended for

- Reducing low frequency time decay

- Vertical Wall

Purpose

- Room mode control - Bass ratio control - Lowfrequency RT reduction - Improving low frequency response

- Small Room Acoustics
- Acoustic pressure zones

#### Fixing Systems

Wall

